



Product Image



Product Description


LED Backlit Panel delivers maximum energy savings with easy installation. It offers a 3-CCT selectable and 4 different light level which allows for easy adjustment.

Luminaire

Model	Length	Width	Height	Wattage	Lumen @3500K
LFP-22-30-40K-150	23.75"	23.75"	1.34"	30W	4500lm
LFP-14-30-40K-150	47.75"	11.93"	1.34"	30W	4500lm
LFP-24-30-40K-150	47.75"	23.75"	1.34"	50W	7500lm

Key Feature	Direct wire
Ingress Protection	IP20
Material	Aluminium housing and PS diffuser
Finish	White powder coated

Line Drawing

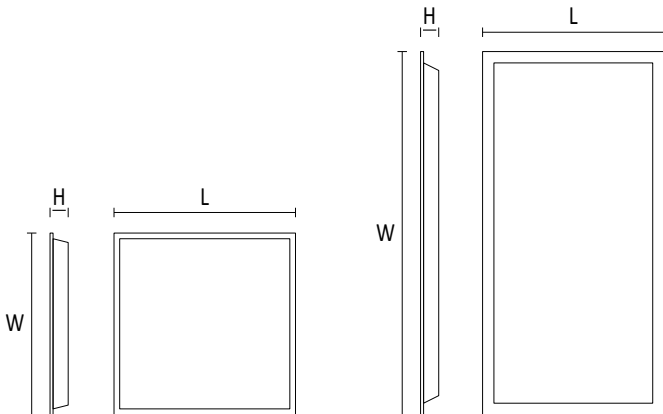

LEDs

Type	LED
CCT	Single CCT or 3CCT (3000K, 4000K & 5000K)
Ra	>80

Driver

Input Voltage	120-277VAC
Output Current	Constant Current
Dimming	0-10V Dimmable
Power Factor	> 0.9

Certification

ETL