



## Product Image



## Product Description



The LED Garage Light uses a rigid diffuser which gives the best lighting performance. It is an energy efficient replacement for traditional parking garages or canopies.

## Luminaire

Model	Width	Height	Wattage	CCT	Lumen @4000K
LGL-40-35K	10"	2.7"	40W	3500K	5200lm
LGL-60-35K	10"	2.7"	60W	3500K	7800lm

Beam Angle	150 degree
Ingress Protection	IP65
Operation Temp.	-20 ~ 40°C
Material	Die-Casting Aluminum Alloy housing and Polycarbonate diffuser

## Line Drawing

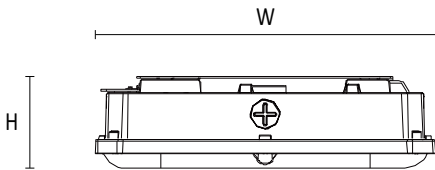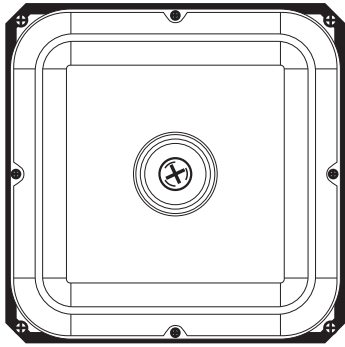

## LEDs

Type	LED
CCT	Single CCT or 3CCT (3000K, 4000K & 5000K)
Ra	>80

## Driver

Driver	Built-in driver
Input Voltage	120-277VAC
Output Current	Constant Current
Power Factor	> 0.9
Dimming	0-10V dimming

## Sensor

Microwave & Photocell Sensor (Optional)

## Emergency Battery

Optional

## Certification

cETLus

## Warranty

5 year warranty