



Product Image



Product Description


Designed to fit in a modular dropped ceiling grid, this fixture easily replaces standard fluorescent light fixtures with a high brightness and low power consuming commercial fixture. Each troffer light has a junction box on the backside for AC and 0-10V dimming input. A built-in universal driver allows for a wide range of AC input from 100-277VAC for home, office, and industrial applications.

Luminaire


Model	Length	Width	Height	Wattage	CCT	Lumens Max
LRTC-22-27-35K	23.80"	23.80"	2.76"	27W/24W/20W/16W	3500K	3250lm
LRTC-14-27-35K	47.80"	11.90"	2.76"	27W/24W/20W/16W	3500K	3250lm
LRTC-24-40-35K	47.80"	23.80"	2.76"	40W/34W/26W/20W	3500K	4800lm

Line Drawing


LRTC-14-27-35K

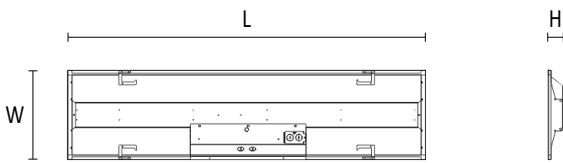

LRTC-22-27-35K

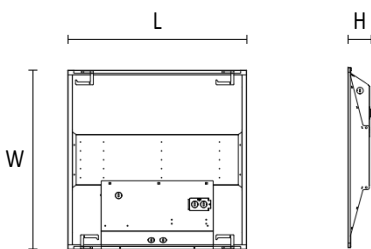

LRTC-24-40-35K

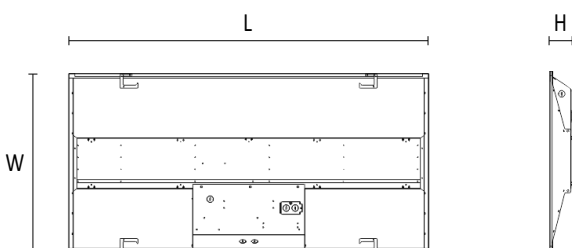

LEDs

Type	LED
CCT	Single CCT or 4CCT (3000K, 4000K, 4500K & 5000K)
Ra	>80

Driver

Driver	Built-in driver
Wattage Output	Wattage selectable
Input Voltage	120-277VAC
Output Current	Constant Current
Dimming	0-10V dimming

Certification

cETLus

Warranty

5 year warranty