



Product Image



Luminaire


Model	Length	Width	Height	Wattage	Lumens
UCS2-12	12"	3.5"	1.1"	7W	430lm
UCS2-24	24"	3.5"	1.1"	12.5W	880lm

Ingress Protection	IP20
Material	Cold rolled steel housing
Finish	White powder coat

Performance

Input Voltage	120VAC, 60Hz
CCT	3000K
Ra	>90
Dimming	TRIAC dimmable
Power Factor	> 0.9

Line Drawing

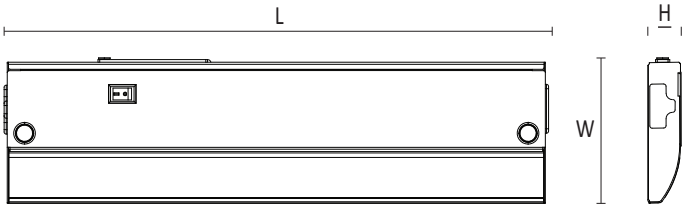

Certification

cETLus listed

Hardware kit




Mounting screw
x 2 pcs



Flexible metal
conduit retainer
x 2 pcs



Romex retainer
x 2 pcs



Linking cord
x 1 pc

Ordering Information:

Example: UCS2-12-07-9030-T

Model	Wattage	LED	Option	Driver	Option
UCS2-12 = Length 12" UCS2-24 = Length 24"	07 = 7W 12 = 12.5W	90 = Ra >90 30 = 3000K	for special order optional	T = TRIAC dimmable	for special order optional